


SERIES "MP" SELECTION CHART

This chart shows the proper components required for ordering "MP" series standard Thermoplastic Sliding Vane pumps. To order simply: Select the series and size pump you need from the brochures and performance curves. Then select one option from each of the 5 categories shown in the column below and write its code after the series & size designation.

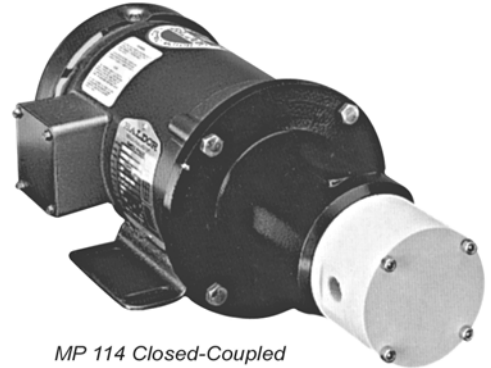

MP 114 Closed-Coupled

CATEGORY SELECTION:

SERIES:

MP Standard Thermoplastic Sliding Vane pumps.

SIZE:

- 114
- 214
- 314
- 414

MATERIAL:

- S - Polypropylene
- V - PVDF (Kynar)


MAGNETIC COUPLING:

- 1 - Ferrite
- 2 - Samarium Cobalt

MOTOR DRIVE:

- 1 - TEFC, Close-Coupled, 3 phase
- 2 - TEFC, Closed-Coupled, 1 phase
- 3 - UL-EXP, Close-Coupled, 3 phase
- 4 - UL-EXP, Close-Coupled, 1 phase
- 5 - Bearing Pedestal for Base Mounting
- 6 - Complete Close Coupled pump, less motor

ORDERING EXAMPLE:

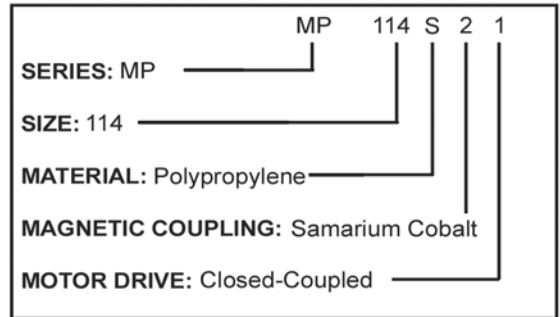

All pumps are provided with NPT **THREADED PORTS** and NEMA 56C Closed-Coupled motors **STANDARD**

For Specific Materials of Construction Refer to Production Code Sheet.